


Product data sheet

FT200--B *

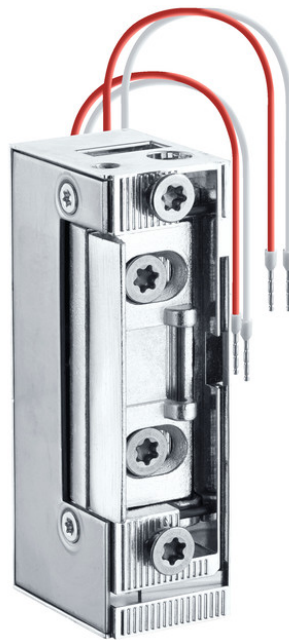

Electric strike with basic configuration

AREAS OF APPLICATION

- Fire protection doors with swing door drives
- Installation possible on left and right hand doors as well as horizontal or vertical
- Connection to direct or alternating current



PRODUCT FEATURES

- Approved for smoke and fire protection doors
- Almost silent opening behaviour with direct current with one click
- Twin coil technology enables a larger operating voltage range
- Integrated bipolar EMC protective diode which protects connected electronic components against reverse voltage
- Adjustable radius latch by 4 mm, in 1 mm pitch

TECHNICAL DATA

Productname	FT200--B *
Dimensions	20.5 x 69 x 28 mm
DIN direction	left / right
Set position x grid dimension	5 x 1 mm
Latch engagement depth	6 mm
Installation position vertical / horizontal	Yes
Fail-safe	No
Fail-secure	Yes
Dummy strike	No
Continuous operation voltage	12V / 24V AC/DC
Approval for smoke protection doors	Yes
Suitability for fire protection doors	Yes
Mechanical release	No
Bipolar EMC protection diode integrated	Yes
Twin coil technology	Yes

VARIANTS / ORDER INFO

Designation	Description	Ident- No.	Dimensions	DIN direction
FT200--B electric strike for fire protection doors *	Momentary contact: 12 - 48 V AC/DC / Continuous operation stability: 12 or 24 V AC/DC +/- 15% / Current consumption: 200 mA (at 12 V) / 100 mA (at 24 V) / Dimensions (W x H x) D: 20.5 x 69 x 28 mm	184348	20.5 x 69 x 28 mm	left / right

FT200--B *



* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.